


High Pressure Seal Injection For Larger General Repairs Plan View of Seal

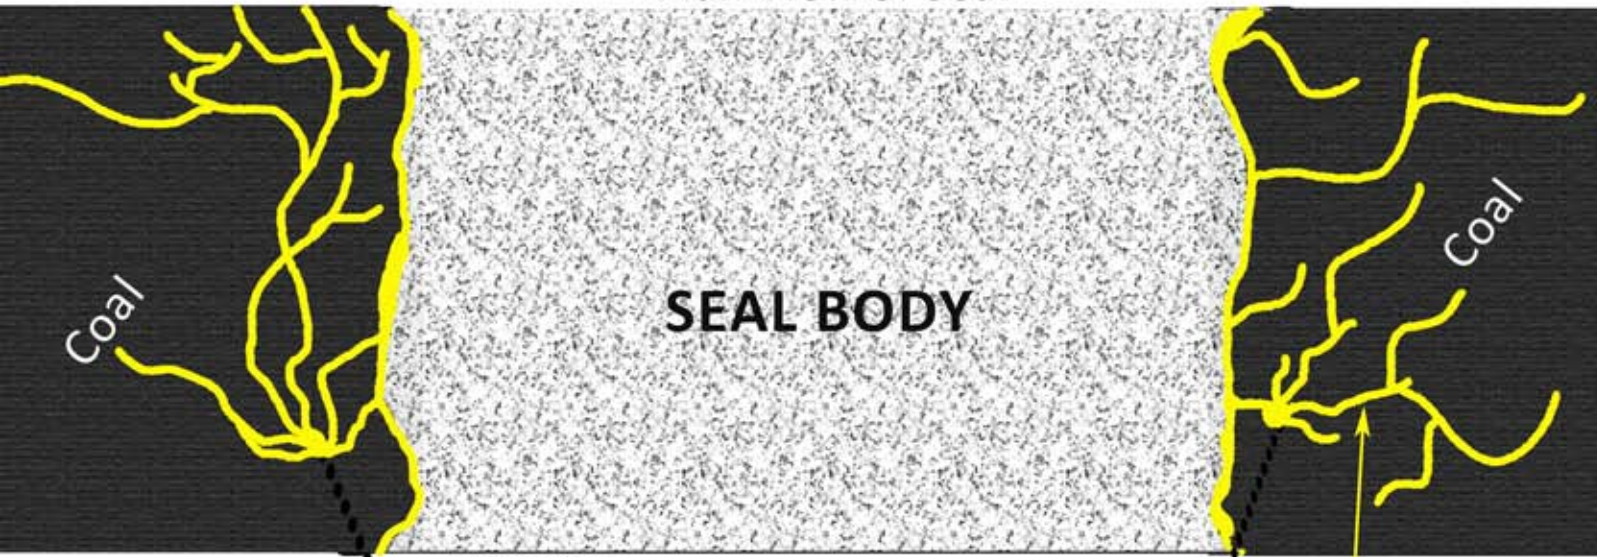


Instructions:

- 1) Drill and Set Packers around Perimeter of Seal (Roof, Rib & Floor)
- 2) Inject HyperFlex until a show of material is seen around the Seal Edges or until pressure increase

① Extensions set around Seal Perimeter (Roof, Rib & Floor)

② Reacted urethane at Perimeter of Seal

 =HyperFlex



Mine Seal Repair

SealGuard Inc.
WORLD CLASS WATER SEALING SOLUTIONS

PO Box 1178
Mars, Pa 16046
866-625-4550
www.sealguardinc.com